

PCT/KR 2004 / 002044
RO/KR 01.09.2004

REC'D 14 SEP 2004

WIPO

PCT

1205966

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

August 04, 2004

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE UNDER 35 USC 111.**

**APPLICATION NUMBER: 10/641,239
FILING DATE: August 14, 2003**

**PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)**

Certified by



Jon W Dudas

**Acting Under Secretary of Commerce
for Intellectual Property
and Acting Director of the U.S.
Patent and Trademark Office**



BEST AVAILABLE COPY



08/14/03

Attorney Docket No. 1723.01

PATENT APPLICATION COVER SHEET

MAIL STOP PATENT APPLICATION
 COMMISSIONER FOR PATENTS
 P.O. BOX 1450
 ALEXANDRIA, VA 22313-1450

03945 U.S. PTO
 10/641239
 08/14/03

Sir:

Transmitted herewith is a utility patent application of:

Inventor: TAE-JUN CHUNG

For: SKIN RESURFACING DEVICE

Small Entity Status: THE INVENTOR CLAIMS THE SMALL ENTITY STATUS

Also enclosed are:

- ☒ Sheet(s) of Drawing
☒ Information Disclosure Statement
☒ Declaration and Power of Attorney from the Inventors

- ☐ An Assignment of the Invention to _____
☐ A fee of \$40.00 for the Recordation of the Assignment
☐ Declaration and Power of Attorney from the Assignee
☐ A Verified Statement to Establish Small Entity Status Under 37 C.F.R. § 1.9 and 37 C.F.R. § 1.27 for the Assignee

☒ The Filing Fee - as calculated below.

| | | |
|--------------------------------|-----------------|--------------|
| Basic Fee | \$375.00 | small entity |
| Claims: (15-20)X\$9 | \$0.00 | small entity |
| Independent Claims: (1-3)X\$42 | \$0.00 | small entity |
| TOTAL | \$375.00 | |

A check in the amount of \$375.00 to cover the filing fee is enclosed.

The Commissioner is hereby authorized to charge payment of any additional fees associated with this communication, or credit any over-payment to Deposit Account No. 16-0310.

Yours truly,

Park & Sutton LLP

Date:

8/14/03

John K. Park

Registration No. 37,904

CUSTOMER NO. 29338

3255 Wilshire Blvd., Suite 1110
 Los Angeles, CA 90010
 (Tel) 213-389-3777
 (Fax) 213-389-3377

Clients\1723clnt.b-s\1723covap01.doc

"EXPRESS MAIL" MAILING LABEL NUMBER E0712506395 US
 DATE OF DEPOSIT: 8/14/03
 I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE
 UNITED STATES POSTAL SERVICE "EXPRESS" MAIL POST OFFICE TO
 ADDRESSEE SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE
 AND IS ADDRESSED TO MAIL STOP PATENT APPLICATION, COMMISSIONER
 FOR PATENTS P.O. BOX 1450 ALEXANDRIA, VA 22313-1450
 BY [Signature] PRINT Hana Choi

A SKIN RESURFACING DEVICE

BY

TAE-JUN CHUNG

BACKGROUND OF THE INVENTION

The present invention relates to a skin resurfacing device. More particularly, this invention relates to a skin resurfacing device that peels the outermost layers of skin to provide a refreshed skin surface.

Dermabrasion is the process of removing skin blemishes or imperfections. By removing the outermost layer of skin, pigment lesions, skin discoloration, aging spots, lines, and other skin blemishes or imperfections can be treated and often repaired.

One technique in dermabrasion is to abrade the skin surface using compressed air, and a powdered, abrasive substance, typically microcrystals of quartz, metal, or aluminum oxide, then removing the abrasive substance and loosened skin tissue using a vacuum. The vacuum, through a treatment tool, collects skin debris after the crystals abrade the epidermis.

1

"EXPRESS MAIL" MAILING LABEL NUMBER EO 017506395 US
DATE OF DEPOSIT: 8 / 14 / 03
I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE
UNITED STATES POSTAL SERVICE "EXPRESS" MAIL POST OFFICE TO
ADDRESSEE SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE
AND IS ADDRESSED TO MAIL STOP PATENT APPLICATION, COMMISSIONER
FOR PATENTS P.O. BOX 1450 ALEXANDRIA, VA 22313-1450
BY [Signature] PRINT Hana Choi

Another technique in dermabrasion is permanently attaching an abrasive material to the treatment tip, instead of a powdered substance. Often the permanently
5 attached abrasive materials are diamonds, aluminum oxide, silicon carbide, silicon oxide, or metal nitride. (U.S. Patent Nos. 6,241,739 and 6,500,183). A disadvantage of this technique is when skin debris is held and remains between abrasive particles, it is very difficult to remove
10 the debris completely. Remaining debris may cause serious medical problems such as bacteria infection. Remaining debris also degrade abrasion performance. Disadvantages of the prior art include the need for these techniques to be typically administered in medical facilities and requiring
15 commercial means for sterilization and cleaning of the abrasive tip. Thus, these techniques of dermabrasion are often very expensive.

SUMMARY OF THE INVENTION

20

The present invention contrives to solve the disadvantage of the prior art.

An objective of the invention is to provide a skin resurfacing device designed for both domestic and professional use that is inexpensive and simple to use. Another objective of the invention is to provide a
5 disposable and replaceable skin resurfacing device so there is either no need or minimum need to sanitize or clean the abrasive tip that contacts and peels the skin. Yet another objective of the invention is to provide a double filtering system that is visible to the user to insure proper
10 functioning of the skin resurfacing device.

To achieve the above objectives, a device for skin resurfacing comprises a skin treater, and a vacuum source connected to the skin treater. The skin treater comprises a
15 hollow tube having a first end, a second end, an abrasive tip detachably fixed on the first end, a first filter that is provided inside the tube between the first end and the second end where the vacuum source is connected to the second end. The hollow tube of the skin treater has a
20 transparent portion so that the filter is visible outside. The abrasive tip has abrasive particles. In another embodiment of the skin treater, the parts are not detachable, but the entire skin treater is disposable.

The abrasive particles of the abrasive tip consist of aluminum oxide crystals, silicon carbide crystals, or silicon oxide crystals having a predetermined range of size from about sixty (60) μ to about one hundred fifty (150) μ .

5 The abrasive tip is made by pressure molding and heat treating the abrasive particles. The abrasive tip has a flat annular portion that contacts the skin of a user, and wherein a suction hole is provided in the annular portion through which air is sucked. The abrasive tip is coated
10 with liquid ceramic material that is colored with different colors according to the different size of abrasive crystals. In another embodiment of the abrasive tip, the abrasive tip has a roller that protrudes from the flat annular portion so the roller contacts and rolls on the
15 skin of the user.

The skin resurfacing device has a skin sensor that measures the oiliness of the skin of a user. The intensity of the vacuum provided by the vacuum source is
20 automatically controlled according to the measured oiliness by the skin sensor or manually controlled by the user. The skin resurfacing device has a timer that controls the operation time of the device.

There is also a second filter between the skin treater and the vacuum source that includes a container that with
5 an open end, a lid that plugs the open end, an inlet pipe passing through the lid, an outlet pipe passing through the lid, and a filter element that is fixed to the outlet pipe. The container is detachable from the lid.

10 The advantages of the present invention are: (1) a skin resurfacing device of the present invention is suitable for mass production at low cost; (2) a skin resurfacing device that is inexpensive in relation to other skin resurfacing devices; (3) the skin resurfacing device
15 that is made for both personal and professional use; (4) the skin resurfacing device that has a double filtering system filters the skin debris with greater efficiency; (5)
a skin treater of the skin resurfacing device that has detachable parts for ease of disposal, replacement, and
20 cleanliness; and (6) a skin treater that provides a replaceable and disposable abrasive tip.

Although the present invention is briefly summarized, the fuller understanding of the invention can be obtained

by the following drawings, detailed description and
appended claims.

5

DESCRIPTION OF THE FIGURES

These and other features, aspects and advantages of
10 the present invention will become better understood with
reference to the accompanying drawings, wherein:

FIG. 1 is a perspective view of a skin resurfacing
device according to the present invention;

15

FIG. 2 is an elevation view of a skin treater;

FIG. 3 is a cross-sectional view taken along the line
3-3 of FIG. 2;

20

FIG. 4 is a rear view of the skin resurfacing device;

FIG. 5 is a cross-sectional view of a second filter;

FIG. 6 is a block diagram of the skin resurfacing process;

FIG. 7 is a cross-sectional view of another embodiment
5 of a skin treater and abrasive tip; and

FIG. 8 is a cross-sectional view of the an abrasive tip with a roller.

10

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 shows a skin resurfacing device 10 which has a housing 12, a skin sensor 22, and a skin treater 34. The housing 12 comprises an ON/OFF switch 14, a skin sensor starting button 16 to measure the level of skin oiliness, a
15 skin peeling start button 18 to begin the skin peeling process, and a pressure controller button 20 for controlling the intensity of the peeling pressure and vacuum pressure. The skin sensor 22 is connected to the
20 housing 12 by an electrical wire 24. Skin sensor electrodes 26 that measure the oiliness of the skin are provided on the skin sensor 22 on the opposite end of the electrical wire 24. The skin sensor 22 can be placed in the skin sensor slot 28 when the skin sensor 22 is not in use. The

skin resurfacing device 10 adjusts the pressure applied in the peeling process based on the oiliness of skin measured by the skin sensor 22. The intensity of the peeling pressure and vacuum pressure is also controllable with the pressure controller button 20 and the amount of intensity is indicated by the pressure indicator 30. The LED timer 32 times each individual skin resurfacing session. When the device 10 is turned on, the timer is reset for a time that is usually from 15 to 20 minutes.

10

A skin treater 34 has a hollow tube 35 having a first end 38, a second end 42, an abrasive tip 36 detachably fixed on the first end 38, and a first filter 64 provided between the first end 38 and the second end 42. The skin treater 34 is connected to a vacuum source inside the housing 12 by a tubular hose 44 at the second end 42. The strength of vacuum is displayed by the LED pressure indicator 30. The user can manually adjust the vacuum strength that has been automatically set by the device 10.

20 The contact strength of the skin treater 34 on the skin of the user follows the vacuum strength. When the vacuum is strong, the abrasive tip 36 adhere to the skin more tight. After the timer is off, the device continues to suck air

for about 10 seconds so that debris within the skin treater
34 is removed.

FIG. 2 is a front elevation view of the skin treater
5 34. The hollow tube 35 includes an abrasive tip 36, a first
tube 39, a transparent portion 40, and a second tube 43.
The first filter 34 is located inside the transparent
portion 40. The abrasive tip 36, first tube 39, transparent
portion 40, first filter 64, and second tube 43 are all
10 detachable for ease of cleaning and replacement. The
transparent portion 40 of the skin treater 34 allows the
first filter 40 to be visible to the user. Thus, the user
is able to see and confirm that the skin resurfacing device
10 is functioning properly. The transparent portion 40 that
15 allows visibility of the first filter 40 also serves to
inform the user when the skin treater 34 and all the
comprising parts need replacement, either individually or
as a whole.

20 As shown in FIG. 3 the abrasive tip 36 has a flat
annular portion 60 that contacts the skin of the user. The
abrasive tip 36 also has a suction hole 62 in the annular
portion 60 where air is suctioned in causing skin particles
peeled by the abrasive tip 36 to be suctioned in as well.

Once the abrasive tip 36, which is made of aluminum oxide or silica oxide crystals between the predetermined range of sixty (60) μ to about one hundred fifty (150) μ , peels the outer layer of the skin, it is suctioned through the

5 suction hole 62 as the skin treater 34 is moved along the skin in a direction consistent with the muscles of the skin. The variance in range of the crystals on the abrasive tip produce different levels of abrasion, with the larger particles peeling skin more rapidly. The abrasive tips are

10 color-coordinated according to the predetermined range and are easily detachable and replaceable. The abrasive tip is made by pressure molding a mixture of aluminum oxide powder, silicon oxide (SiO_2), and Fe_2O_3 , etc. and heat treating the molded mixture at about 2000 degree Celsius to

15 solidify the mixture. The solidified mixture has a little porosity. However, it is desirable to remove any porosity in order not to degrade suction performance of the skin treater. Liquid ceramic material is coated on the surface of the abrasive tip to seal pores. The liquid ceramic

20 material is colored with a different color for a different size of abrasive crystals. Thus the color of the coating indicates abrasive particle size. Skin resurfacing operation is enhanced by choosing different abrasive size for different skin conditions.

Sanitary concerns, such as skin debris lodged in and between the crystals are reduced or eliminated because the abrasive tip 36 is very easily changed. Particles and skin debris picked up by the vacuum through the suction hole 62 pass along the first tube 39 to the transparent portion 40 that contains the first filter 64. The first filter 40 filters the debris so mostly air is passed to the second tube 43.

10

FIG. 4 shows the back of the housing 12 where the electrical wire 24 and the tubular hose 44 are connected. A rear recess 66 is provided in the back of the housing 12 to hold the second filter 46. The second filter 46 is provided between the skin treater 34 and the vacuum source.

15

FIG. 5 shows the second filter 46 comprising a lid 48 that is fixed to the housing 12. The lid 48 contains two openings, a first opening 50 and a second opening 52. An inlet hose 72 runs through the first opening 50. An outlet tube 54 from the vacuum source runs through the second opening 52. The outlet tube 54 contains a filter element 56 that acts as a second line of filtering after the first filter 64. A container 58 with an open end 59 is provided.

20

The open end 59 is plugged by the lid 48. The container 58 is detachably attached to the lid 48 and encloses the inlet hose 72 and the outlet tube 54. Any remaining debris and mostly air pass from the second tube 43 are routed into the first opening 50 of the lid 48 through the inlet tube 72 and then falls to the bottom of the container 58 due to gravity. The vacuum source provides a vacuuming effect that collects skin debris by suctioning skin peeled by the abrasive tip 36. The vacuum source 68 also increases the closeness of contact between the abrasive tip 36 and the user's skin due to the flow of air through the skin treater 34. The outlet pipe 54 powered by the vacuum source picks up the smaller debris. Any debris that is picked up by the outlet pipe 54 is filtered by the filter element 56 so only air flows past the filter element 56.

FIG. 6 shows a block diagram of the skin resurfacing process. To operate the skin resurfacing device 10, the ON/OFF switch 14 activates the power supply 70. The skin sensor 22, with skin sensor electrodes 26 at the end, measures the oiliness of the user's skin. The controller 74 adjusts vacuum pressure of the skin peeling process. The pressure is automatically set at a constant level by the controller based on the measurement of oiliness displayed

on the pressure indicator 20. The user is also able to
adjust the pressure with the pressure controller button 20
according to the desired pressure at either constant or
variable levels. The skin treater 34 is connected to the
5 vacuum source 68 that is also adjusted by the controller
74. The skin treater 34 is disposable.

FIG. 7 shows a skin treater 34 having an abrasive tip
36 having a different shape. Also the skin treater 34 has a
10 transparent hollow tube 35.

FIG. 8 shows an abrasive tip that is similar to the
abrasive tip 36 but further includes a roller 76 that
protrudes from the flat annular portion so that the roller
15 76 contacts and rolls on the skin of a user. The roller 76
is rotationally attached to the wall of the abrasive tip 36
with a rotation axis 78. The roller 76 has a role of
pressing the portion of the skin that is resurfaced by the
skin resurfacing device 10.

20

While the invention has been shown and described with
reference to different embodiments thereof, it will be
appreciated by those skilled in the art that variations in
form, detail, compositions and operation may be made

without departing from the spirit and scope of the invention as defined by the accompanying claims.

WHAT IS CLAIMED IS:

1. A skin resurfacing device comprising
 - a) a skin treater, and
 - b) a vacuum source connected to the skin treater,wherein the skin treater comprises a hollow tube having a first end, a second end, an abrasive tip detachably fixed on the first end, a first filter that is provided inside the tube between the first end and the second end, wherein the abrasive tip comprises abrasive particles, and wherein the vacuum source is connected to the second end.
2. The skin resurfacing device of claim 1 wherein the abrasive particles of the abrasive tip comprises aluminum oxide crystals, silicon carbide crystals or silicon oxide crystals having a predetermined range of size.
3. The skin resurfacing device of claim 2 wherein the predetermined range of the abrasive particles size is from about sixty (60) μ to about one hundred fifty (150) μ .

4. The skin resurfacing device of claim 2 wherein the abrasive tip is made by pressure molding and heat treating abrasive particles.
5. The skin resurfacing device of claim 2 wherein the abrasive tip has an flat annular portion that contacts the skin of a user, and wherein a suction hole is provided in the annular portion through which air is sucked.
6. The skin resurfacing device of claim 2 wherein the abrasive tip is coated with liquid ceramic material.
7. The skin resurfacing device of claim 6 wherein the liquid ceramic material is colored with a different color for a different size of abrasive crystals.
8. The skin resurfacing device of claim 1 wherein the abrasive tip comprises a roller that protrudes from the flat annular portion so that the roller contacts and rolls on the skin of a user.

9. The skin resurfacing device of claim 1 further comprising a skin sensor that measures the oiliness of the skin of a user.
10. The skin resurfacing device of claim 9 wherein the intensity of the vacuum provided by the vacuum source is controlled according to the measured oiliness by the skin sensor.
11. The skin resurfacing device of claim 10 wherein a user can adjust the intensity of the vacuum.
12. The skin resurfacing device of claim 1 further comprising a timer that controls operation time of the device.
13. The skin resurfacing device of claim 1 wherein the tube has a transparent portion so that the filter is visible outside.
14. The skin resurfacing device of claim 1 further comprising a second filter between the skin treater and the vacuum source.

15. The skin resurfacing device of claim 14 wherein the second filter comprises a container that comprises an open end, a lid that plugs the open end, an inlet pipe passing through the lid, an outlet pipe passing through the lid, a filter element that is fixed to the outlet pipe, wherein the container is detachable from the lid.


ABSTRACT

A skin resurfacing device for peeling the outermost layer of the skin for renewing the skin surface and repairing skin damage including a housing, a skin sensor, and a skin treater. The skin treater consists of an abrasive tip, a first end, a transparent portion, a first filter, and a second end, all of which are detachable and replaceable. The skin treater is connected to a vacuum source by a tubular hose. The vacuum provides both closeness of contact between the abrasive tip and the user's skin and the suctioning of skin debris peeled off. The skin treater, especially the abrasive tip are made with common material and mass production process so that they are disposable and economic.

1/5

FIG. 1

10

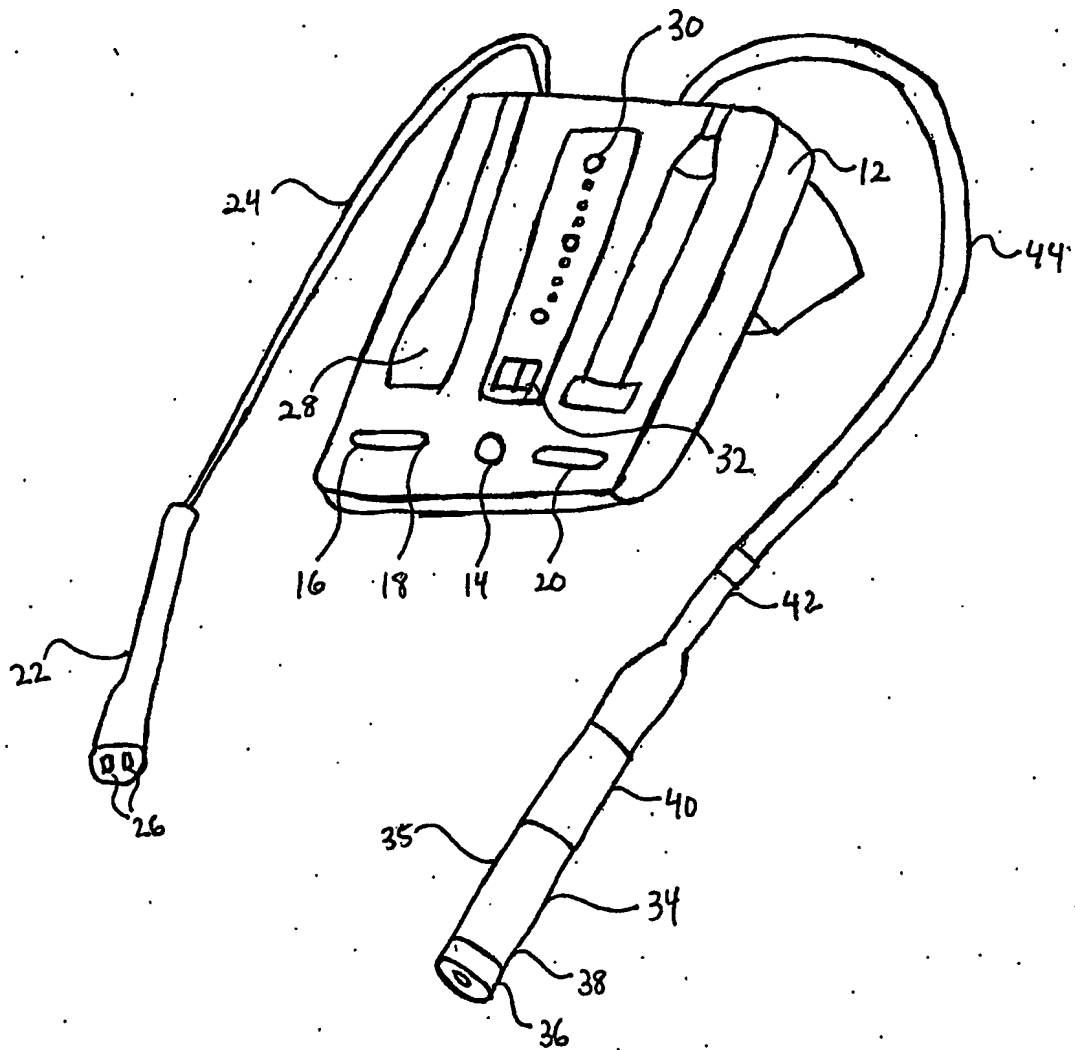

2/5

FIG. 2

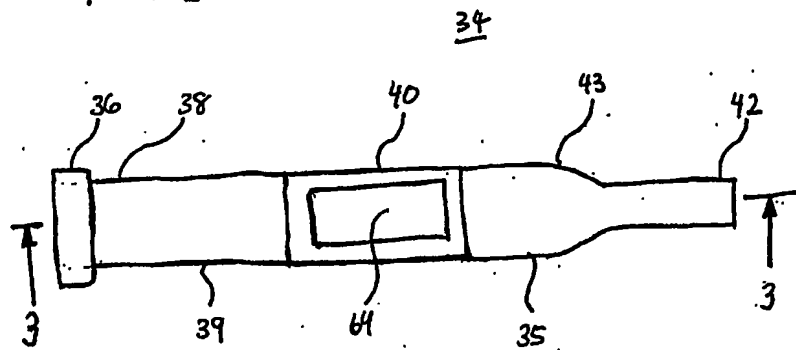


FIG. 3

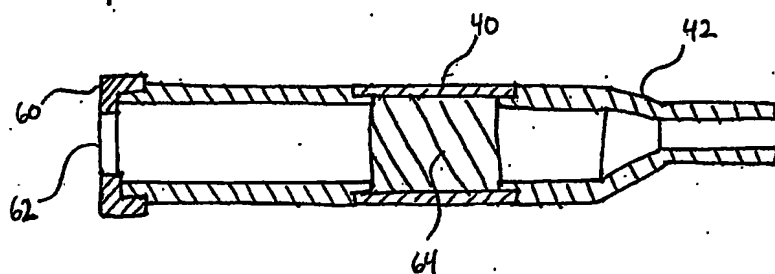


FIG. 4

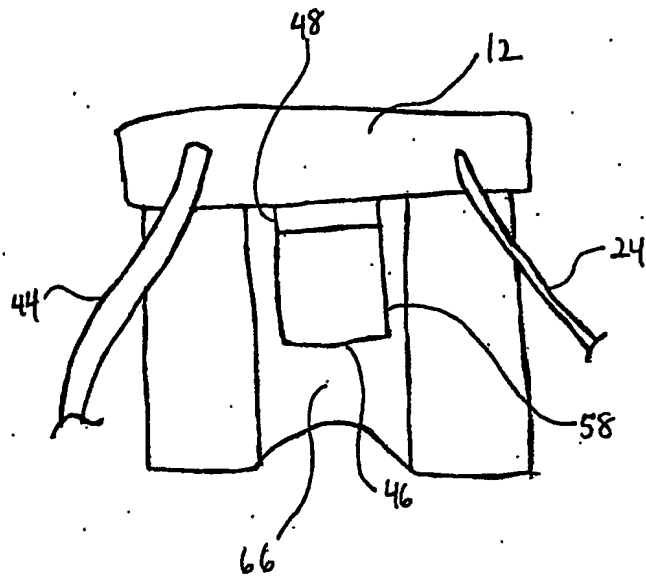


FIG. 5


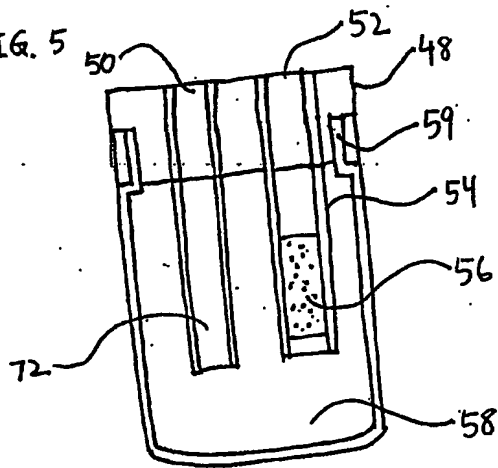


FIG. 6

4/5

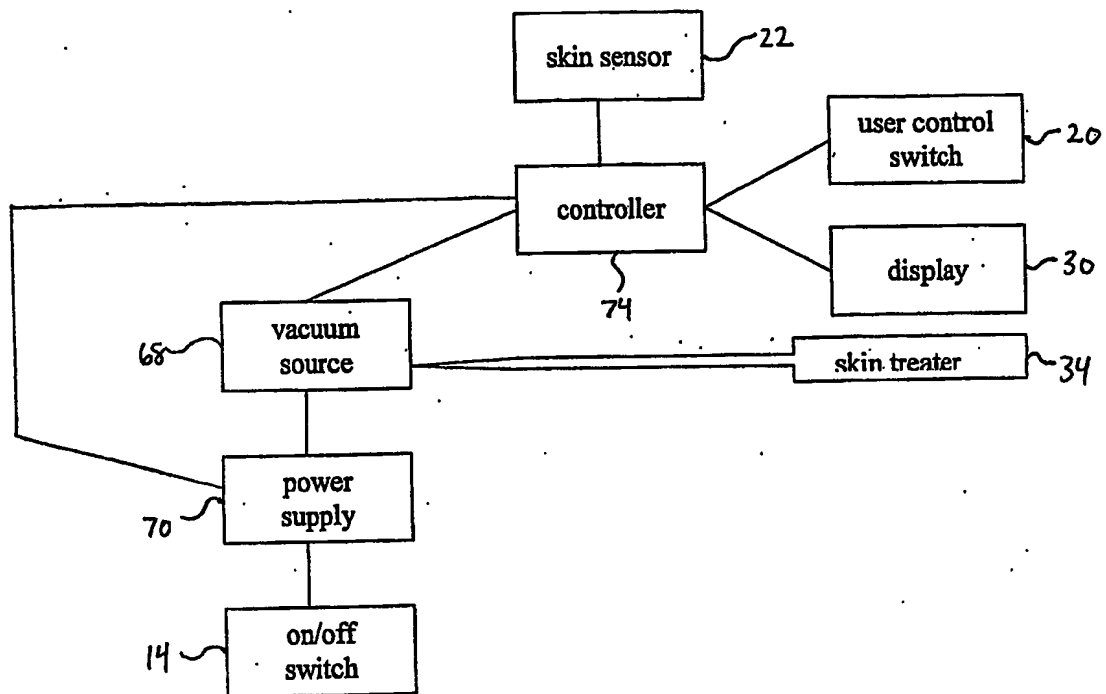

5/5

FIG. 7

34


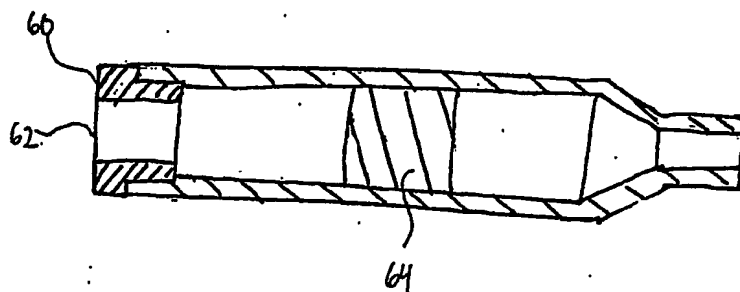


FIG. 8



PARK & SUTTON LLP

3255 Wilshire Blvd., Suite 1110
Los Angeles, California 90010
Telephone: (213) 389-3777 Facsimile: (213) 389-3377

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION

As a below-named inventor, I hereby declare that: my residence, post office address, and citizenship are as stated below next to my name; I believe I am) the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SKIN RESURFACING DEVICE

the specification of which is attached hereto. If not attached hereto, the specification was filed on _____ as
(mm/dd/yyyy)

United States Application Number _____; and amended on _____ (if applicable) and/or
(mm/dd/yyyy)

the specification was filed on _____ as PCT International Application Number _____ and was
(mm/dd/yyyy)

amended on _____ (if applicable).
(mm/dd/yyyy)

I have read the applicable statutes and rules reprinted on the reverse side of this declaration which I understand to describe subject matter which is material under 37 C.F.R. § 1.56(a).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a). I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

| Application Number | Country | Date of Filing | Priority Claimed | |
|--------------------|---------|----------------|------------------------------|-----------------------------|
| | | | Yes <input type="checkbox"/> | No <input type="checkbox"/> |
| | | | Yes <input type="checkbox"/> | No <input type="checkbox"/> |

I hereby claim the benefit under Title 35, United States Code, 19(e) of any United States provisional application(s) as provisional application number _____ and filed on _____.
(mm/dd/yyyy)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

| Application Number | Date of Filing | Status - Patented, Pending, or Abandoned |
|--------------------|----------------|--|
| | | |
| | | |


Send Correspondence to:

John K. Park (Reg. No. 37,904)
Park & Sutton LLP
3255 Wilshire Blvd., Suite 1110
Los Angeles, California 90010
Telephone: (213) 389-3777 Facsimile: (213) 389-3377

or **Customer No. 29338**

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application of any patent issuing thereon.

Sole or First Inventor

| | | | |
|---|--|---|--|
| Given Name Tae-Jun | | Family Name Chung | |
| Residence (City, State & Country) Yongjin City, Kyungki-Do, KOREA | | Citizenship Republic of Korea | |
| Mailing Address 289-5, SungBok-Dong, Su Ji, Yongjin City, Kyungki-Do, KOREA | | | |
| Inventor's Signature  | | Date Oct. 17. 07. | |

Second Inventor

| | | | |
|-----------------------------------|--|-------------|--|
| Given Name | | Family Name | |
| Residence (City, State & Country) | | Citizenship | |
| Mailing Address | | | |
| Signature | | Date | |

Third Inventor

| | | | |
|-----------------------------------|--|-------------|--|
| Given Name | | Family Name | |
| Residence (City, State & Country) | | Citizenship | |
| Mailing Address | | | |
| Signature | | Date | |

Fourth Inventor

| | | | |
|-----------------------------------|--|-------------|--|
| Given Name | | Family Name | |
| Residence (City, State & Country) | | Citizenship | |
| Mailing Address | | | |
| Signature | | Date | |

POWER OF ATTORNEY

I hereby appoint the practitioners at Customer No. 29338 as my attorneys or agents to prosecute the United States Letters Patent Application titled:

SKIN RESURFACING DEVICE

and to transact all business with full power of substitution and revocation in the United States Patent and Trademark Office connected therewith, unless the inventor(s) or assignee(s) provides said practitioners with a written notice to the contrary.

Send Correspondence to:

John K. Park (Reg. No. 37,904)

Park & Sutton LLP

3255 Wilshire Blvd., Suite 1110


Los Angeles, California 90010

Telephone: (213) 389-3777 Facsimile: (213) 389-3377

or Customer No. 29338

I, the undersigned, declare that I am the owner of the above-mentioned application or, if the owner is a corporation, partnership, or other association, I am authorized to make this appointment on behalf of the owner, and I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application of any patent issuing thereon.

Sole or First Inventor

| | |
|--|----------------------|
| Given Name Tae-Jun | Family Name Chung |
| Mailing Address 289-5, SungBok-Dong, Su Ji, Yongin City, Kyungki-Do, Republic of Korea | |
| Signature  | Date 08.12.03 |

Second Inventor

| | |
|-----------------|-------------|
| Given Name | Family Name |
| Mailing Address | |
| Signature | Date |

Third Inventor

| | |
|-----------------|-------------|
| Given Name | Family Name |
| Mailing Address | |
| Signature | Date |

Fourth Inventor

| | |
|-----------------|-------------|
| Given Name | Family Name |
| Mailing Address | |
| Signature | Date |

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.